



FSW DEHUMIDIFIER




- | | |
|--|--------------------------------------|
| W+ Suitable for all installations | W+ Remote control |
| W+ Available models: wall-mounted - built-in - ductable | W+ Electric auxiliary heating |
| W+ Galvanised metal bodywork | W+ R410a gas |
| W+ Ideal for SPA or indoor pool | W+ CE certification |



FSW DEHUMIDIFIER

Wall-mounted, built-in or ductable thanks to its installation kits



SPECIFICATIONS


PRODUCT	FSW 63 *	FSW 100 *
Capacity	2.4 L/h	3.9 L/h
Extraction per day	57.6 L	93.6 L
Air flow	600 m ³ /h	980 m ³ /h
Sound volume	49 dB	52 dB
Sound volume (distance)	3 m	3 m
Power	240 V~/50 Hz	240 V~/50 Hz
Average power consumption(27°C - 60% HR)	0.84 kW	1.39 kW
Rated current with electrical resistance (35°C - 70% HR)	13.3 A	19.3 A
Max. power (35°C - 70% HR)	0.97 kW	1.61 kW
Max. power consumption (35°C - 70% HR)	4.4 A	7.5 A
Relative humidity	40-90% HR	40-90% HR
Temperature	10-32°C	10-32°C
Gas	R410a	R410a
Electricity supply included	2 kW	2.7 kW
Diameter condensation plug	3/4"	3/4"
Unit size	1010 * 605 * 232 mm	1218 * 737 * 248 mm
Box size (l / L / h)	1070 * 660 * 280 mm	1260 * 790 * 320 mm
Net weight	48 kg	72 kg
Brut weight	50 kg	75 kg
Warranty all parts	2 years	2 years

* Test performed at 30°C air temperature and 80% humidity

* Operating limit :

- Temperature: 10°C - 32°C

- Relative humidity : 40% - 90%.

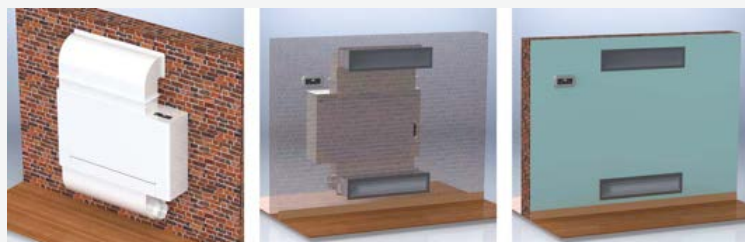

Manchons

ACCESSORIES

- Wall bracket supplied
- Optional electric auxiliary heater
- Remote controller with optional temperature and humidity control as an option
- User manual